

Cranab FC45

The forestry crane that gives the best to the best. The Cranab FC45 has been developed for users who know that quality always pays in the end.


Providing the optimum alternative to smaller forwarders and agricultural tractors, where the crane makes the difference - without shortcuts or compromises!

The Cranab FC45 and its attractive design solutions are inspired by our larger forwarding

cranes. It is therefore also based on the professional demands the forest imposes, with quality down to the finest detail. Parking positions, hosing, hydraulics and high-quality materials provide the perfect complement!

The Cranab FC45 is available in two versions, with either a single or double telescopic outer boom. The latter offers excellent reach, for thinning. The linking outer boom ensures a wide field of movement, with equal power throughout the entire area. The construction is robust yet light, and is suited to many different kinds of application. The slewing assembly naturally has double slewing cylinders for extra power.

As always, Cranab's well-routed hosing provides superior operating reliability and smoothness. Various valve options can be supplied, mounted in a practical way directly on the foot of the crane.

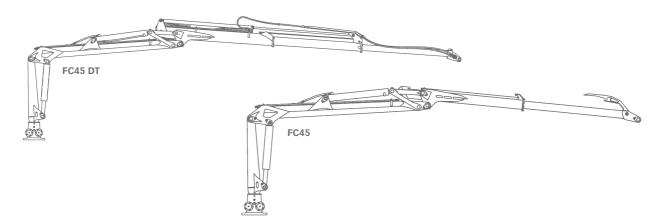

Range of movement.	Technical data Tele:		Technical data Double Telescopic:	
	Max. reach Lifting force at tip of boom:	6.1 m	Max. reach Lifting force at tip of boom:	8.0 m
	at reach 3.0 m 4.6 m 6.1 m	1120 kg 765 kg 570 kg	at reach 3.0 m 4.8 m 8.0 m	990 kg 650 kg 355 kg
White area: the crane's range of movement.	Slewing torque, gross Lifting torque, gross	13.5 kNm 45.6 kNm	Slewing torque, gross Lifting torque, gross	13.5 kNm 45.6 kNm
Size	 Slewing angle Boom extension Working pressure 	380° 1.55 m 19 MPa	Slewing angle Boom extension Working pressure	380° 3.21 m 19 MPa
	Recommended oil flow Weight without unit, rotator and o	40-80 l/min oil 650 kg	Recommended oil flow Weight without unit, rotator and	40-80 l/min Oil 795 kg

Right to alteration reserved. The pictures do not always show cranes in standardversion.



922 82 VINDELN, SWEDEN Tel +46 933-135 00, Fax +46 933-617 36, Mail: info@cranab.se, www.cranab.com

5016619